

BOOSTING YOUR FABRIC PERFORMANCE

WITH OVER 50 YEARS
OF EXPERIENCE

BONDING/LAMINATION

POWDER SCATTERING

HOTMELT LAMINATION

EMBOSSING

SUBLIMATION CALENDER

SINGLE HEAD ROTARY SCREEN PRINTING

DISPERSE & PIGMENT DYE FIXATION

FLOCK & GLITTER PRINTING

UNWINDING & REWINDING

ANTI-SLIP CARPET MACHINE LINE

EMBOSSING DESIGN CYLINDERS



MURATEX
TEXTILE MACHINERY CO.

BOOSTING YOUR FABRIC PERFORMANCE

WITH OVER 50 YEARS OF EXPERIENCE

INSTALLATIONS IN
50 COUNTRIES WORLDWIDE



Doğan Çetin
1942-2020

*In the fond memory of our
beloved founding partner
and past CEO - a visionary
innovator and inventor
and one of the earliest
pioneers in Turkish Textile
Machinery Sector*

Muratex is a family business founded in 1970, dedicated to the design, manufacture, and construction of bespoke technical textile machinery.

We are one of the few technology companies to provide a key role in the technological development of many leading textile companies.

With our innovative systems combined with a practical vision, we produce bespoke and traditional textile machinery for the tech textile, home textile, automotive, aerospace, and marine industries.

Our bespoke machines benefit our collaboration with existing and new customers tailoring them to their exact needs, and opening up new markets and applications.

More than 50 years of experience, combined with extensive knowledge of the applications required, enable Muratex to supply machines to develop customers' businesses, often at a very attractive price, without compromising on quality or speed.

Our experience and knowledge combined with first-class mechanical engineering are what we pass on to you - our customer and partner. We welcome the challenges our customers pose to us by developing customized machines to meet their needs.

We hope Muratex can be your partner of choice and look forward to discussing your new ideas and projects.

Murat Çetin
CEO



Participating to ITMA since 1987



EUROPE

Belarus
Belgium
Bulgaria
Denmark
Finland
France
Greece
Ireland
Italy
Lithuania
Moldova
Netherlands
Norway
Portugal
Poland
Romania
Spain
Sweden
Türkiye
Ukraine
United Kingdom

ASIA

China
Israel
India
Indonesia
Iran
Japan
Lebanon
Pakistan
South Korea
Srilanka
Syria
Thailand
UAE Uzbekistan
Vietnam

AMERICA

Argentina
Brazil
Canada
Ecuador
Mexico
Peru
USA

AUSTRALIA

Australia

AFRICA

Algeria
Egypt
Libya
Morocco
South Africa
Sudan
Tunisia

More than
4 Million Meters
fabric processed in
our machines every day
in the world

More than
1750 Machines
Muratex Machines
sold in 5 continents



Multi
Functional

FIELDS OF APPLICATION
Home Textile, Upholstery, Fashion, Technical Textile



PIECE TO ROLL
SUBLIMATION CALENDER MACHINE

BONDING & SUBLIMATION CALENDER MACHINE

Standards

- Web and film lamination
- Sublimation paper printing
- Thermal adjustment
- Reactivation of disperse and pigment ink

Wide Range

This extensive range of calenders has been developed for continuous printing of fashion and home furnishing fabrics, nonwoven fabrics, nonwoven, and films.

Uniform End Result

An exclusive method of heating the Muratex special cylinders allows for close and constant temperature control, thereby guaranteeing excellent bonding/lamination and print quality in terms of uniformity and ink penetration.

Wide Range of operating temperatures

The wide range of temperatures that can be achieved with our custom-built cylinders (ambient temperature up to 225 °C) means that substrates with different properties and requirements can be processed easily.

Management of Substrates During Heat Transfer Printing Process

With our extensive experience, we can advise on the best devices for managing and handling materials to be treated (woven fabrics, mono and bi-stretch fabrics, etc.)

Machine Configuration

- Different working speeds are possible with heated cylinders from 215 to 1000 mm in diameter
- Cylinder widths from 1600 up to 3600 mm
- Selection of machines ranging from particularly compact versions to configurations for high-volume production
- Wide range of options available, depending on the chosen application and substrate

Other Functionalities

- Eco-friendly process (no solvents and no water used for process)
- Easy and versatile use
- Quick and easy change of pattern/image
- Wide range of use

Wide Range of Applications

Multifunctional machines are also suitable for: Fixing and curing disperse and pigment inks, heat-setting fabrics, bonding/laminating blackout films, thermoplastic, and pressure-sensitive films/webs.

Optional Solutions

- Bonding
- Lamination
- Foil Effects

TECHNICAL SPECIFICATIONS

Standards

- 100% Nomex felt
- Grinded main cylinder
- Aluminium free running rolls
- Pneumatic felt edge control with photocell proximity sensor
- 7" touch screen operator panel with PLC control
- Programmable heating and cooling
- Quick change heavy duty air shaft
- Manual fabric tension control
- Adjustable felt air pressure
- Air shaft to fix the bonding material (both for rewinding and unwinding)
- Air disc brake system for unwinding bonding material roll
- Air disc brake system for unwinding protection paper roll
- Clutch system with airshaft for rewinding protection paper roll

Optionals

- Silicon coated felt
- Teflon coated drum
- Internal pneumatic pressure roll
- Motorized unwinding units
- A-frame to A-frame working system
- Extraction hood
- Cooling unit
- Fabric tensioning unit
- Slitting system (crush, shear, edge trimming)
- Web guiding system
- Cross cutter system and other special requirements

| Drum Diameter (mm) | Working Width (mm) | Drum Diameter (mm) | Working Width (mm) |
|--------------------|--------------------|--------------------|--------------------|
| Ø 215 | 1600 | Ø 600 | 1600 |
| | 1800 | | 1800 |
| | 2000 | | 2000 |
| | 2200 | | 2200 |
| Ø 350 | 1600 | Ø 800 | 2600 |
| | 1800 | | 3200 |
| | 2000 | | 1600 |
| | 2200 | | 1800 |
| Ø 500 | 2600 | Ø 1000 | 2000 |
| | 3200 | | 2200 |
| | 1600 | | 2600 |
| | 1800 | | 3200 |
| | 2000 | | 1600 |
| | 2200 | | 1800 |
| | 2600 | | 2000 |
| | 3200 | | 2200 |
| | | | 2600 |
| | | | 3200 |

For special width and drum size, please contact us



FIELDS OF APPLICATION
 Techtextile, Home Textile, Flooring, Composites,
 Automotive, Non-wovens Textiles, Recycling,
 Construction, Electrics, Filter Media, Food

POWDER SCATTERING UNIT & POWDER LAMINATION LINE

POWDER SCATTERING UNIT

A scattering roller coated with a special needle covering in combination with a precisely adjustable brush belt ensures a highly precise and very even application of the spreading material. This scattering system allows an adjustable working width between 50 mm and 5000 mm depending on the machine's working width as well as the possibility to choose application weights between 3.0g/m2 upwards according to customer requirements.

Our user-friendly scattering systems offer a short cleaning time for scattering roller or brush belts of less than 5 minutes in case of maintenance or process changeover. The scattering is very accurate and can be easily controlled by the operator via the control panel. Our control panel allows the exact processing conditions to be stored for each job being processed. This ensures repeatability and consistency, forthwith.

We offer scattering units for dry powder materials such as;

- Thermoplastic adhesives
- Epoxy powders
- Recyclers
- Activated carbon
- Filling material
- Sand
- Grains etc.....



Customized solutions
 for your specific needs

POWDER LAMINATION LINE

The touch of expert hands ensures perfection. Attention to detail, state-of-the-art technology, and the exact fulfillment of your needs. These are the qualities that distinguish our unique production.

Our powder Lamination Line is specially designed for your production to achieve your final product.

TECHNICAL SPECIFICATIONS

Optionals

- Fabric tension control unit
- Slitting System (crush, shear, edge trimming)
- Cross cutter system
- Motorized unwind and rewinding
- IR pre-heater unit
- Hoist system for lifting the fabric
- Crane system for lifting the fabric
- A-frame to A-frame working system
 Trolley to trolley
 Trolley to A-frame

| Drum Diameter (mm) | Working Width (mm) | Drum Diameter (mm) | Working Width (mm) |
|--------------------|--------------------|--------------------|--------------------|
| Ø 350 | 1600 | Ø 800 | 1600 |
| | 1800 | | 1800 |
| | 2000 | | 2000 |
| | 2200 | | 2200 |
| | 2600 | | 2600 |
| | 3200 | | 3200 |
| Ø 500 | 1600 | Ø 1000 | 1600 |
| | 1800 | | 1800 |
| | 2000 | | 2000 |
| | 2200 | | 2200 |
| | 2600 | | 2600 |
| | 3200 | | 3200 |
| Ø 600 | 1600 | | |
| | 1800 | | |
| | 2000 | | |
| | 2200 | | |
| | 2600 | | |
| | 3200 | | |
| | 3400* | | |
| | 3600* | | |

The sizes above are for Powder Lamination Line
 For special width and drum size,
 please contact us



Shear Cutting System



Tensioning System



Infrared Pre-heater System



Motorized Rewinding
 & Unwinding Unit



HOTMELT LAMINATION MACHINE

Muratex has developed an advanced and compact Hotmelt Lamination Machine, which is specifically designed for lamination. Hotmelt adhesives are widely used in the textile industry, and they come in two forms: one-component solvent-free thermoplastic polymers (non-reactive) and thermoset pre-polymers (reactive).

This machine has the capability to perform thermo-adhesive hotmelt and reactive polyurethane lamination on various materials such as fabric, jersey, elastic fabric, film, breathable membranes, foams, and abrasive sponges. Additionally, different engraved lamination rollers can be provided for this machine.


The control system with load cells ensures that the tension is maintained according to setpoints. Additionally, web guiding systems ensure that the web layers are correctly aligned for the process.

Solution for Textile & non-Textile Lamination

- Membranes
- Foams
- Films
- Woven fabrics
- Nonwoven fabrics
- Knitted fabrics

FIELDS OF APPLICATION


Technical Composites, Home textiles, upholstery, mattress ticking, Automotive Interior, Fusible interlining, Hygiene and medical products, Activewear (outdoor), Functional and protective clothing

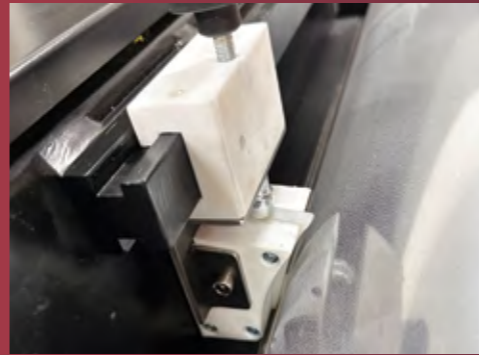

Chemical Working Width Adjustment



Blade Stopper

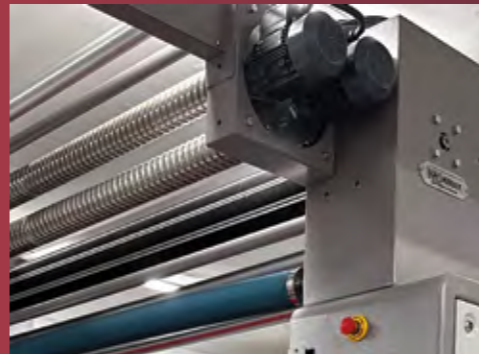

Web Guiding System



Fabric Unwinding Frame

TECHNICAL SPECIFICATIONS

Standards

- Engraved cylinder
- Load cell for fabric feeding synchronization
- Free running brush spreading roll for membrane/fabric
- Silicon-covered pneumatic pressure rolls
- Stainless steel tank for automatic cleaning of engraving cylinder
- Heatable Teflon-coated blade system with pneumatic pressure
- Teflon-coated metal bottom cylinder for squeezing system
- Distance adjustment system (electronically)
- 7" touch screen operator panel with PLC control
- Heating up and cooling down the system
- Web guiding system
- All the cylinders working as a synchronized system

Optionals

- Fabric tension control unit
- Slitting system (crush, shear, edge trimming)
- Cross cutter
- Motorized unwinding & rewinding unit
- A-frame to A-frame working system
- Trolley to A-frame

Machine width Options


1800mm, 2000mm, 2200mm, 2600mm



Air Shaft



Engraved Design Cylinder

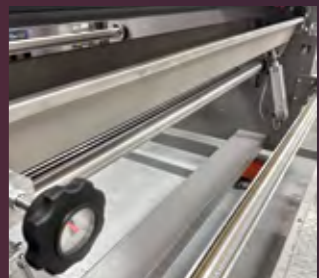

Engraving Cylinder Cleaning Tank



FIELDS OF APPLICATION
Technical Textiles, Membranes, Film, Faux
Leather, Upholstery, Home Textiles etc.

EMBOSSING MACHINE

Standards

Embossing of Substrates

Wide Range

Our extensive range of embossing machines is designed for roll to roll applications such as fabric, membranes, films, foils, papers, synthetic leathers, etc.

Uniform End Result

An exclusive process for heating the custom-made Muratex cylinders enables precise and constant temperature control, guaranteeing excellent embossing quality from start to finish.

Wide Range of operating temperatures

The wide temperature range that can be achieved with our custom-made cylinders (ambient temperature up to 225°C) means that substrates with different properties and requirements can be processed easily and precisely.

Management of Substrates During Heat Transfer Printing Process

Embossing, Cire (Polishing), and Foiling process can be done with the same machine if you equip it with optional extras.

Machine Configuration

- Different working speeds and pressure obtainable with heated cylinders from 215 up to 350 mm diameter
- Cylinder widths from 1600 up to 3200 mm
- Selection of machines ranging from notably compact versions to configurations for high-volume
- Wide range of options, available, depending on the selected application and substrates

Other Functionalities

- Eco-friendly process (no solvents and no water used for process)
- Easy and versatile use
- A quick and easy way to change the design cylinder

Optional Solutions

- Foil Printing
- Cire (Polishing)

TECHNICAL SPECIFICATIONS

Standards


- Hard chromium coated design cylinder
- Hard rubber coated bottom cylinder
- Hydraulic squeezing system
- Touch screen operator panel
- Programmable heating and cooling
- Manual fabric tension control
- Adjustable hydraulic pressure
- Surface mounted rewinding

Optionals

- Mirror cylinder for Cire
- Hard chromium covered cylinder for foil printing
- Rubber coated cylinder for foil printing
- Fan cooling unit
- Chilled cooling rollers
- A-frame to A-frame for continuous production
- Air shaft to fix the foil (both for unwinding and rewinding)
- Air disc brake system for unwinding foil roll
- Slitting system (crush, shear, edge trimming)
- Cross cutter
- Tensioning Unit
- Center rewinding

| Drum Diameter (mm) | Working width (mm) | Drum Diameter (mm) | Drum Diameter (mm) |
|--------------------|--------------------|--------------------|--------------------|
| Ø 215 | 1600 | Ø 270 | 1600 |
| | 1800 | | 1800 |
| | 2000 | | 2000 |
| | 2200 | | 2200 |
| Ø 240 | 1600 | Ø 350 | 2600 |
| | 1800 | | 3200 |
| | 2000 | | 1600 |
| | 2200 | | 1800 |
| | 2600 | | 2000 |
| | 3200 | | 2200 |
| | | | 2600 |
| | | | 3200 |

For special width and drum size, please contact us

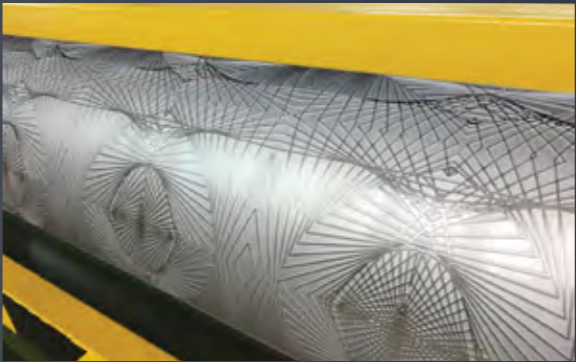

EMBOSSING CYLINDERS

Muratex also offers a design and manufacturing service for the embossing cylinders with a fast turnaround service and very competitive pricing.



FIELDS OF APPLICATION
Fashion, Upholstery, Technical Textile, Home Textile

DISPERSE & PIGMENT DYE FIXATION MACHINE

TECHNICAL SPECIFICATIONS

Standards

- 7" touch screen operator panel with PLC control
- Electronic meter counter
- The speed of the machine from 0,5m/min up to 8m/min
- Manual adjustable fabric tension for entry and exit side
- Roll to roll working system
- From 4 sides emergency stop buttons

Optionals

- A-frame to A-frame working
Trolley to A-frame
Trolley to trolley
- Motorized center unwind & rewind
- Tensioning Unit
- Silicon coated pneumatic pressure roll

| Drum Diameter (mm) | Working Width (mm) | Drum Diameter (mm) | Working Width (mm) |
|--------------------|--------------------|--------------------|--------------------|
| Ø 215 | 1600 | Ø 600 | 1600 |
| | 1800 | | 1800 |
| | 2000 | | 2000 |
| | 2200 | | 2200 |
| | | | 2600 |
| Ø 350 | 1600 | Ø 800 | 3200 |
| | 1800 | | |
| | 2000 | | 1600 |
| | 2200 | | 1800 |
| | 2600 | | 2000 |
| Ø 500 | 3200 | | 2200 |
| | | | 2600 |
| | 1600 | Ø 1000 | 3200 |
| | 1800 | | |
| | 2000 | | 1600 |
| | 2200 | | 1800 |
| | 2600 | | 2000 |
| | 3200 | | 2200 |
| | | | 2600 |
| | | | 3200 |

SINGLE HEAD ROTARY SCREEN PRINTING MACHINE

TECHNICAL SPECIFICATIONS

Standards

- One head rotary screen unit
- Screen report is 640mm
- Stainless steel blade pipe
- 50 kg stainless steel adhesive tank
- Pneumatic chemical pump
- Adjustable blade for right and left, up and down
- Electronic speed control
- Stainless steel waste tank
- Pneumatic cleaning blade for bottom cylinder

Optionals

A-frame to A-frame working
Trolley to A-frame

Machine width options

1800mm, 2000mm, 2200mm,
2400mm, 3200mm

FIELDS OF APPLICATION

Fashion, Upholstery, Technical Textile, Home Textile,
Outdoor Textile





FIELDS OF APPLICATION
Fashion, Upholstery, Technical Textile, Home Textile

UNWINDING & REWINDING UNIT

TECHNICAL SPECIFICATIONS

Standards

- Electronic speed control
- Electronic meter counter
- The speed of the machine from 0,5mt/min up to 15mt/min
- Manual adjustable fabric tension for entry and exit side
- From 5 sides emergency stop buttons

Optionals

- Center unwind and rewind system with airshaft
- Tensioning unit
- Spreading roll
- Cross cutter

Machine Width Options

1800mm, 2000mm, 2200mm, 2400mm,
2600mm, 3200mm

FLOCK & GLITTER PRINTING MACHINE

TECHNICAL SPECIFICATIONS

Standards

- One head Rotary screen unit on the blanket system
- 640mm screen report is
- Stainless steel blade pipe
- Pneumatic chemical pump
- Adjustable blade for right and left, up and down
- Complete polyamide and plexiglas brush cabin
- 2 brush inside the flock cabin
- Under the brush has sieves
- The sieves covered with chromium
- The flock cabin covered by plexiglas for security
- 50 kg stainless steel adhesive tank

Machine width options

1800mm, 2000mm, 2200mm, 2400mm

- The flock cabin adjustable up and down by manual
- The machine has 4 emergency stop from all corner
- Under the blanket table is covered with copper
- All the brush electronic speed control
- Blanket speed control
- The machine for roll to roll printing
- The fabric entry with pneumatic squeezing cylinder
- The fabric entry tension control by manual
- After printing Vacuum Unit
- Vacuum unit is working with nonwoven filters
- Adjustable static voltage unit 100.000 mV
- Dry system static generator

FIELDS OF APPLICATION
Fashion, Upholstery, Technical Textile, Home Textile





Bonding/Lamination Unit

FIELDS OF APPLICATION
Home Textile

ANTI-SLIP CARPET MACHINE LINE

3 in 1 Production Line LAMINATION, ROTATION AND DRYER

- User-friendly anti-slip back surface
- Maximum speed
- Low-cost investment and production
- Unlimited creativity and design

Imagine a machine line that creates a new carpet trend worldwide. Wouldn't it be nice if the production for that was easy, fast and the cost surprisingly low? Where the end products are user-friendly with its anti-slip function and the machine gives you the freedom of unlimited designs?

We have developed that machine for you!

With Muratex's unique Anti-slip machine line, you can produce amazing carpets that add great value to your business.

Muratex's anti-slip carpet line comprises 3 production units: Bonding/Lamination Machine, Rotary Screen-printing Machine, and Dryer Unit.

In the laminating unit, the desired fabric is glued to the felt using the film. In the rotation unit, an anti-slip PVC chemical is printed on the surface of the felt. And the final product is fixed in the drying unit to ensure the durability of the anti-slip function.

The products you can make with our machine are user-friendly thanks to their anti-slip function, lightness, and washability.

Unlimited Combination and Freedom of Design User-friendly

The products you can make with our machine are user-friendly thanks to their anti-slip function, lightness, and washability. From velvet, blanket, and suede to shag, you may use all kinds of fabrics. And you may create unlimited carpet designs.

Single Head Rotary Screen Printing Unit



Dryer Unit



Low Cost Investment and Production

The production costs achieved with our machine are much lower than with conventional carpet weaving machines. The production speed of our machine is also much higher. Thanks to our Anti-Slip Carpet Line, you may sell your carpets much cheaper than your competitors and thus increase your competitiveness.

User-friendly

The products that you can produce with our machine are user-friendly thanks to their anti-slip function, lightness, and washability.

Working width according to your needs

We manufacture machines with a working width of 1600 mm to 3600 mm, which we adapt entirely according to your requirements.

Anti-Slip Gel Back

Thanks to special PVC chemicals, we achieve permanent anti-slip functionality. The design stencil rolls are also easy to replace.



MURATEX
TEXTILE MACHINERY CO.



Davutpaşa Cad. Kale iş Merkezi, C Blok

No: 164 Topkapı, İstanbul, TÜRKİYE

Phone: +90 212 481 80 73

Fax: +90 212 481 80 76

E-mail: info@muratex.net



www.muratex.net



Please go to www.muratex.net/our-agents or scan the QR code on the left to view our authorized representatives in countries